
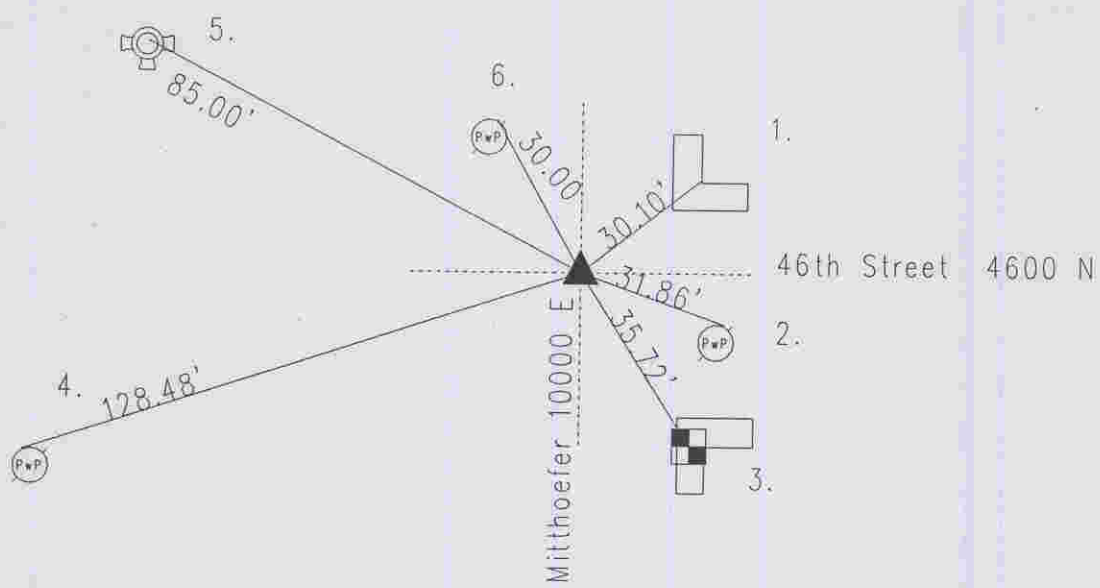


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 16 TOWNSHIP 16 RANGE 5
DATE: 3-1-06
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 8-12-01

IN. S.P.C. E ZONE NAD '83
NAME: 16051601
N: 509913.8550(m)
E: 72213.0770(m)

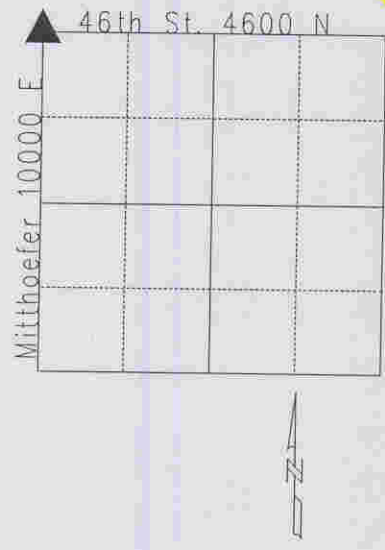

Original post set 1820 by Hendricks with witness: 18" hickory S 50 E 16 links; 12" elm N 55 W 41 links per Marion County Atlas pg. 15. D.B. Hosbrook 9-1-1851 indicates no stone but witness: 6" oak N 64 E 25 links per Lawrence Township Legal Survey Book pg. 57. J.M. Bell 3-8-1892 indicates a stone no witness per Lawrence Township Legal Survey Book pg. 48. McLand 4-14-70 called a PK nail. Fortner 3-17-75 called a railroad spike. Gries 3-16-88 called same. Wilcoxen 10-3-96 called PK nail w/washer. Wilcoxen 7-23-01 excavated and set Harrison. No other points were found. Re-tied 8-12-01 by Whiteside. Re-tied 3-1-06 by Wilcoxen. 16051601

REF.	DISTANCE	DESCRIPTION
1.	30.10'	Inside of corner headwall
2.	31.86'	Mag nail w/bw NF PwP#17-381 C 10"up
3.	35.72'	USC&GS Benchmark Law. 72B Elevation 844.04'
4.	128.48'	Road nail N PwP#40-381BB 12"up
5.	85.00'	Top nut of fire hydrant
6.	30.00'	PK nail w/washer NF PwP#66-381BA 10"up